



Manufactured and Designed by PICOTECH

www.kwebeams.co.za

+27 12 940 9589




Technical Specification – KwêBeams Wireless Outdoor Sensor

Dimensions:	205(L), 70(W), 78(D)
Weight:	450g (Including batteries)
Detection Method:	Dual Passive Infrared
Coverage:	15 – 18m, 90 degree wide on even surface
Detection fingers:	9
Average Power consumption:	60uA -100uA (Depending on Siren settings)
Siren Sound level:	95db
Power supply:	4.5V - 3 X (2000 – 2700 mA/H AA alkaline batteries)
Warm-up period:	3 minutes
LED indicator:	LED on during warm-up period
Mounting height:	0.8 – 1.2m
Tamper switch:	Tamper when front cover is removed
Walk test Mode:	Audible walk test mode
No detection period:	30 seconds after valid detection
Programmable Sensitivity:	8 sensitivity levels. 1 or 2 pulse count option
Supervision:	24 Hour detection supervision
Radio frequency:	868 MHz

Detection Area

Top View:

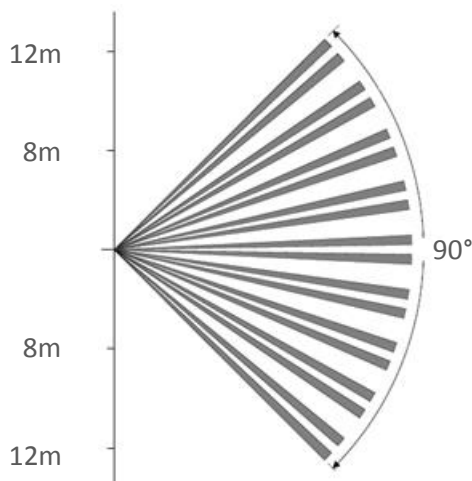

Side View:

